arXiv:1205.3745v1 [quant-ph] 16 May 2012

Quantum network coding for quantum repeaters

Takahiko Satoh,[1, *] François Le Gall,[1, †] and Hiroshi Imai[1, ‡]
[1] *Department of Computer Science, Graduate School of Information Science and Technology, The University of Tokyo, 7-3-1, Hongo, Bunkyo-ku, Tokyo, Japan*

(Dated: March 4, 2013)

This paper considers quantum network coding, which is a recent technique that enables quantum information to be sent on complex networks at higher rates than by using straightforward routing strategies. Kobayashi et al. have recently showed the potential of this technique by demonstrating how any classical network coding protocol gives rise to a quantum network coding protocol. They nevertheless primarily focused on an abstract model, in which quantum resource such as quantum registers can be freely introduced at each node. In this work, we present a protocol for quantum network coding under weaker (and more practical) assumptions: our new protocol works even for quantum networks where adjacent nodes initially share one EPR-pair but cannot add any quantum registers or send any quantum information. A typically example of networks satisfying this assumption is *quantum repeater networks*, which are promising candidates for the implementation of large scale quantum networks. Our results thus show, for the first time, that quantum network coding techniques can increase the transmission rate in such quantum networks as well.

I. INTRODUCTION

Quantum communications hold potentialities which are qualitatively different from classical communications. For example, quantum key distribution (QKD) provides shared, secret bits (useful for classical cryptography) whose secrecy does not depend on the presumed difficulty of factoring large numbers or other number-theoretic problems, as the commonly-used Diffie-Hellman key exchange protocol does.

Urban scale and complex topology QKD networks have already been constructed experimentally [1, 2]. However, it is still difficult to realize long distance quantum communication. Quantum repeaters [3, 4] are a potential approach for dealing with this problem. Quantum repeaters have three important functions: the first is the basic physical creation of entanglement over long distances, the second is management of imperfections in the created quantum states (e.g., purification [5–7] or recent works using error correction different from purification [8–10]), and the third is extending entanglement from the endpoints of a single channel to distant nodes in a topologically complex network (e.g., entanglement swapping [11–13]).

In quantum repeater networks, EPR-pairs are consumed as a source of quantum communication and require a high cost for sharing and conservation. The communication capacity of a quantum repeater network is limited by the maximum number of qubits the quantum repeater can store and operate on at one time. Hence, in the future, large and complex quantum repeater networks will be confronted with the bottleneck problem caused by shortage of quantum resources.

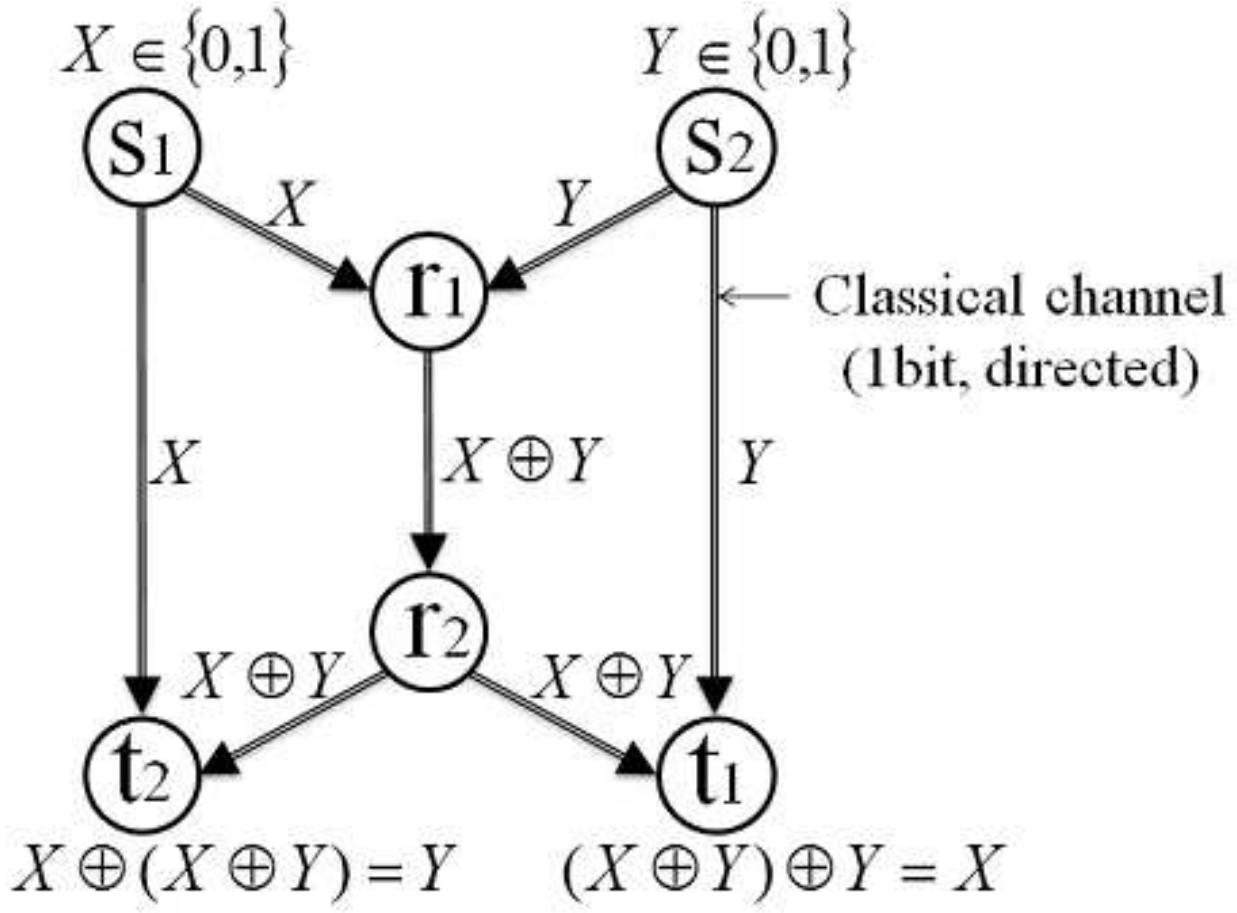
$X \in \{0,1\}$
$Y \in \{0,1\}$
S1
S2
r1
r2
t1
t2
X
Y
Classical channel (1bit, directed)
$X \oplus Y$
$X \oplus (X \oplus Y) = Y$
$(X \oplus Y) \oplus Y = X$

FIG. 1. The butterfly network and a classical coding protocol. Source nodes (s_1 and s_2) have for input bits X and Y. The task is to send simultaneously bit X from s_1 to t_1 and bit Y from s_2 to t_2. This task is implemented by using a XOR operation at relay node r_1 and target nodes (t_1 and t_2). Note this task cannot be solved by using routing.

Meanwhile, large scale classical networks such as the Internet have continued to increase their communication volume, and also have the bandwidth bottleneck problem. To address this problem, classical network coding [14] is drawing attention. One of the most useful applications of this method is throughput enhancement for certain traffic patterns: network coding is able to achieve higher throughput than independent forwarding of every data packet, by active encoding of the packets at intermediate nodes. We show an example of multiple-unicast transmission over the directed butterfly network by using this technique in Fig. 1.

Recently, researchers expanded network coding to include quantum information [15–18] and showed that network coding using quantum information is available with-

---

[*] satoh@is.s.u-tokyo.ac.jp
[†] legall@is.s.u-tokyo.ac.jp
[‡] imai@is.s.u-tokyo.ac.jp

out infringement of the non-cloning theorem (which forbids duplication of an unknown quantum state). After that, [19–21] proved that, for any graph, quantum perfect network coding is feasible, if free classical channels are available, whenever classical network coding is possible. But these later works do not consider concrete implementation issues and, especially, assume the availability of additional quantum resources such as quantum registers at each node of the network. Implementation is nevertheless a fundamental problem. Indeed, in order to be able to use network coding on real quantum networks, the amount of quantum resources required by the protocol need to be minimized.

In this work, we study quantum network coding for practical quantum networks where adjacent nodes initially share one EPR-pair but cannot add any quantum registers or send any quantum information. Typical examples are the quantum repeater networks discussed above. Since this setting forbids the introduction of quantum registers, the methods from [19–21] cannot be applied directly. Our results nevertheless demonstrate that quantum network coding can be realized in this model as well and are, to the best of our knowledge, the first application of network coding to increase the transmission rate in quantum repeater networks. This may become an effective countermeasure against communication congestion in quantum repeater networks.

Our results are obtained by constructing a version of the protocol in [21] that does not require the introduction of any quantum register. This is non-trivial and requires new ideas. The key idea is to convert, using only local operations and classical communication, the EPR-pairs between adjacent nodes into appropriate entangled states of higher dimension shared between distant nodes. To do this, we introduce two new techniques inspired by quantum teleportation [22] and one-way quantum computation [23], which we call "Connection" and "Removal", that enable us to manipulate such entangled states and systematize the methods of encoding.

II. PRELIMINARIES

A. Notations

We suppose that the reader is familiar with the basics of quantum information theory and refer to [24] for a good reference. In classical information science, the fundamental unit of information is described as a binary digit (bit). In the case of quantum information, a quantum bit (qubit) is the equivalent of a bit. A qubit is expressed as a superposition of two orthonormal quantum states $|0\rangle$ and $|1\rangle$ with amplitudes α and β as follows:

$$|\psi\rangle = \alpha|0\rangle + \beta|1\rangle,$$

where α and β are complex number satisfying $|\alpha|^2 + |\beta|^2 = 1$. A general quantum state of n qubits can be written as $|\psi\rangle = \sum_{x\in\{0,1\}^n} \alpha_x|x\rangle$, where α_x are complex numbers such that $\sum_{x\in\{0,1\}^n}|\alpha_x|^2 = 1$.

In this paper, we will use the Pauli operators σ_X and σ_Z and the Hadamard operator, which are the following single qubit transformations:

$$\sigma_X := |1\rangle\langle 0| + |0\rangle\langle 1|,$$

$$\sigma_Z := |0\rangle\langle 0| - |1\rangle\langle 1|,$$

$$H := \frac{1}{\sqrt{2}}(|0\rangle\langle 0| + |1\rangle\langle 0| + |0\rangle\langle 1| - |1\rangle\langle 1|).$$

We denote by $|+\rangle, |-\rangle$ the Hadamard basis:

$$|+\rangle = H|0\rangle = \frac{1}{\sqrt{2}}\left(|0\rangle + |1\rangle\right),$$
$$|-\rangle = H|1\rangle = \frac{1}{\sqrt{2}}\left(|0\rangle - |1\rangle\right).$$

We will also use the Control-NOT gate, which is the following two qubits transformation.

$$\begin{aligned}\mathrm{CNOT}^{(\mathbf{A},\mathbf{B})} := &|0\rangle_A|0\rangle_B\langle 0|_A\langle 0|_B + |0\rangle_A|1\rangle_B\langle 0|_A\langle 1|_B \\ &+|1\rangle_A|1\rangle_B\langle 1|_A\langle 0|_B + |1\rangle_A|0\rangle_B\langle 1|_A\langle 1|_B.\end{aligned}$$

We denote by $|\Psi^+\rangle$ and $|\Phi^+\rangle$ the following two qubits state (EPR-pairs):

$$|\Psi^+\rangle = \frac{1}{\sqrt{2}}\left(|00\rangle + |11\rangle\right), \quad |\Phi^+\rangle = \frac{1}{\sqrt{2}}\left(|01\rangle + |10\rangle\right),$$

and by $|GHZ\rangle$ the following three qubits state:

$$|GHZ\rangle = \frac{1}{\sqrt{2}}\left(|000\rangle + |111\rangle\right).$$

B. Quantum repeater network

We define a quantum repeater network as a network consisting of a number of quantum repeaters, undirected classical channels and EPR-pairs $|\Psi^+\rangle$ (each pair of adjacent quantum repeaters shares one EPR-pair). We show an example of network with three quantum repeaters in Fig. 2.

On the network of Fig. 2, quantum communications are possible between adjacent repeaters (s-r and r-t) by teleportation using shared EPR-pairs. Furthermore, quantum communication between the non-adjacent repeaters s and t is possible by applying entanglement swapping (the relay repeater r converts the two EPR-pairs $|\Psi^+\rangle_{AB} \otimes |\Psi^+\rangle_{CD}$ to one EPR-pair $|\Psi^+\rangle_{AD}$). In this way, each repeater performs quantum communication by EPR-pairs and LOCC on this network.

The present paper will show that, for specific networks, network coding can achieve a better throughput than this simple entanglement swapping strategy.

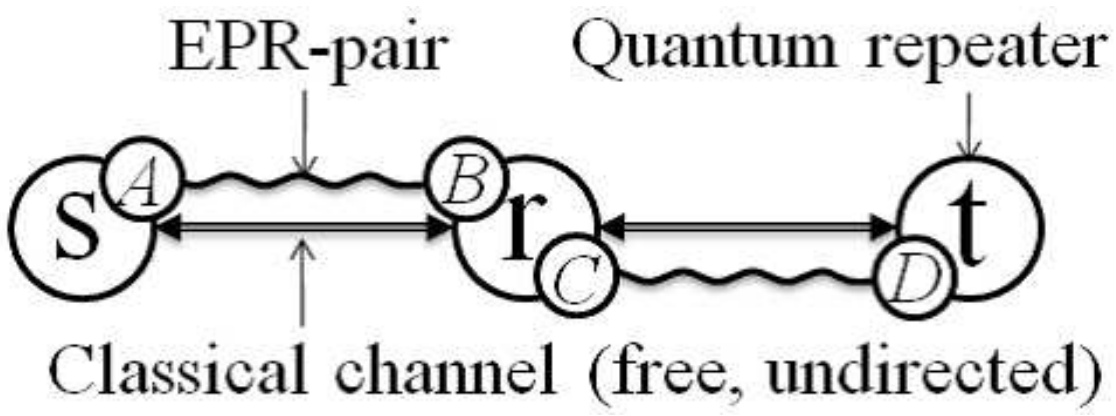

FIG. 2. An example of quantum repeater network. There are three quantum repeaters (s, r and t), two free classical channels and two EPR-pairs $|\Psi^+\rangle_{AB}$ and $|\Psi^+\rangle_{CD}$ between s-r and r-t, respectively.

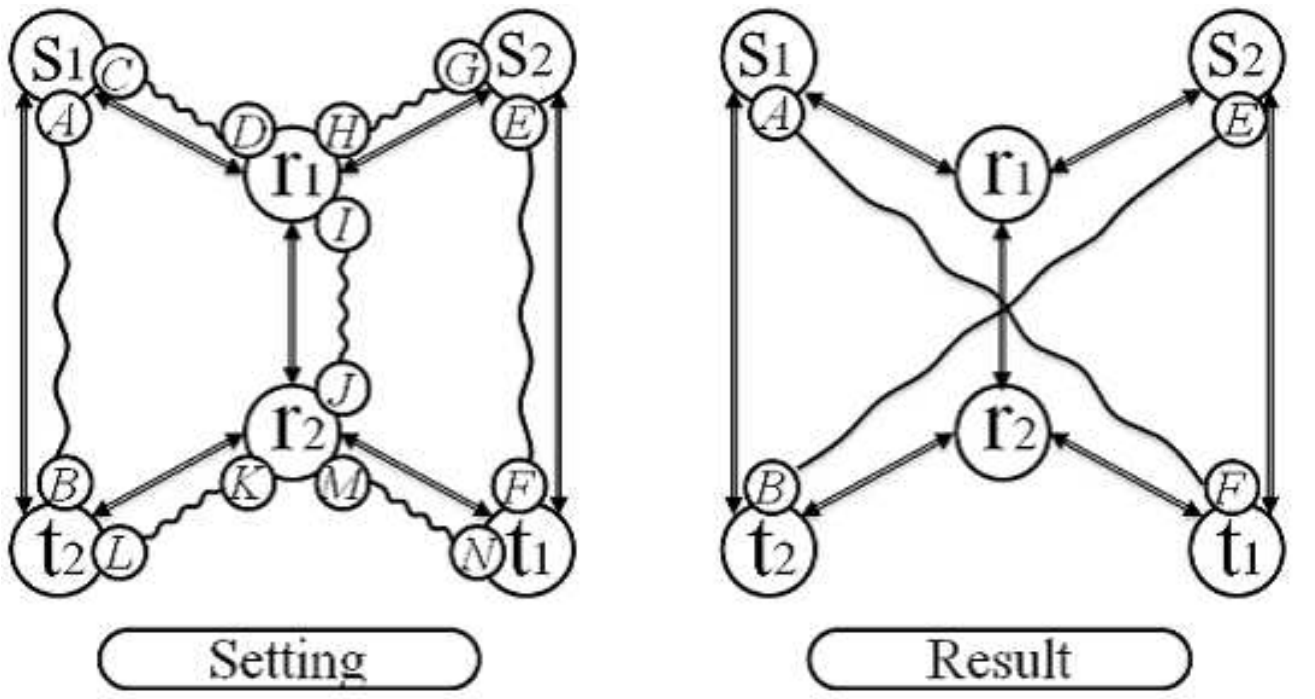

FIG. 3. The setting for our protocol. After the excution of the protocol, s_1 and t_1 (similarly, s_2 and t_2) share one EPR-pair and are then able to perform quantum teleportation.

III. QUANTUM REPEATER NETWORK CODING

We present the setting for our protocol in Fig. 3. The goal of this work is to simultaneous send quantum information between two pairs of repeaters ((s_1, t_1) and (s_2, t_2)) located diagonally on a butterfly quantum repeaters network. For this purpose, we construct a protocol for quantum repeater network coding that generates EPR-pairs $|\Psi^+\rangle_{AF}$ and $|\Psi^+\rangle_{BE}$ by using only LOCC and shared EPR-pairs between adjacent quantum repeaters. Simultaneous quantum communication between (s_1, t_1) and (s_2, t_2) can then by achieved by teleportation using these EPR-pairs.

We cannot generate these EPR-pairs simultaneously by using only entanglement swapping [11, 12] because of the constitution of this network. Moreover, we cannot apply existing quantum network coding methods ([21]) directly because these methods require the introduction of intermediate quantum registers, which is not possible in our model of quantum repeater networks. In this work, we construct a protocol for sharing EPR-pairs without additional quantum registers.

In subsection A and B we first show two new techniques. In subsection C we give an overview of our protocol. In subsection D we present a preliminary protocol. In subsection E we give the final version of our protocol.

TABLE I. $\mathbf{Con}^{C}_{R->T}$

	C and R are 1-qubit registers owned by u. T is a 1-qubit register owned by v.
Step 1.	u applies $CNOT^{(C,R)}$.
Step 2.	u measures R in the $\{|0\rangle, |1\rangle\}$ basis. Let $a \in \{0, 1\}$ be the outcome.
Step 3.	u sends a to v by a classical channel.
Step 4.	If $a = 1$ then v applies σ_X to T

A. Technique 1: Connection

Our first technique is called Connection. Connection is a non-unitary operation between two repeaters (u and v, respectively). Repeater u has Control and Resource qubits (C and R, respectively). Repeater v has a Target qubit (T). We show the procedure for Connection as Table I. This technique corresponds to sending one bit in the original classical network coding scheme and is utilizing the basis manipulation method of quantum teleportation [22]. The following lemma shows the action of Connection.

Lemma 1. *Let $|\Psi_{init}\rangle$ be a state of the form*

$$|\Psi_{init}\rangle = (\alpha|\psi_0\rangle|0\rangle_C + \beta|\psi_1\rangle|1\rangle_C) \otimes |\Psi^+\rangle_{RT} \otimes |\Phi\rangle,$$

where $\alpha^2 + \beta^2 = 1$ and $|\psi_0\rangle$, $|\psi_1\rangle$ and $|\Phi\rangle$ are arbitrary quantum states. Then the state after applying $\mathbf{Con}^{C}_{R->T}$ to $|\Psi_{init}\rangle$ is

$$|\Psi_{final}\rangle = (\alpha|\psi_0\rangle|00\rangle_{CT} + \beta|\psi_1\rangle|11\rangle_{CT}) \otimes |\Phi\rangle,$$

where register R can be disregarded.

Proof. At step 1, we apply $CNOT^{(C,R)}$. The state becomes

$$\begin{aligned}|\Psi_1\rangle &= \alpha|\psi_0\rangle|0\rangle_C \otimes |\Psi^+\rangle_{RT} \otimes |\Phi\rangle \\ &\quad+\beta|\psi_1\rangle|1\rangle_C \otimes |\Phi^+\rangle_{RT} \otimes |\Phi\rangle.\end{aligned}$$

At step 2, we measure R. When $a = 0$ the state becomes

$$|\Psi_2\rangle = (\alpha|\psi_0\rangle|00\rangle_{CT} + \beta|\psi_1\rangle|11\rangle_{CT}) \otimes |\Phi\rangle,$$

and when $a = 1$ the state becomes

$$|\Psi_{2'}\rangle = (\alpha|\psi_0\rangle|01\rangle_{CT} + \beta|\psi_1\rangle|10\rangle_{CT}) \otimes |\Phi\rangle,$$

where register R has been disregarded since it is not entangled anymore. At step 4, if $a = 1$ then we apply σ_X to T. The state becomes

$$|\Psi_3\rangle = (\alpha|\psi_0\rangle|00\rangle_{CT} + \beta|\psi_1\rangle|11\rangle_{CT}) \otimes |\Phi\rangle = |\Psi_{final}\rangle.$$

□

For example, Lemma 1 shows that applying $\mathbf{Con}^{A}_{C->D}$ to two EPR-pairs

$$|\Psi_{init}\rangle = |\Psi^+\rangle_{AB} \otimes |\Psi^+\rangle_{CD}$$

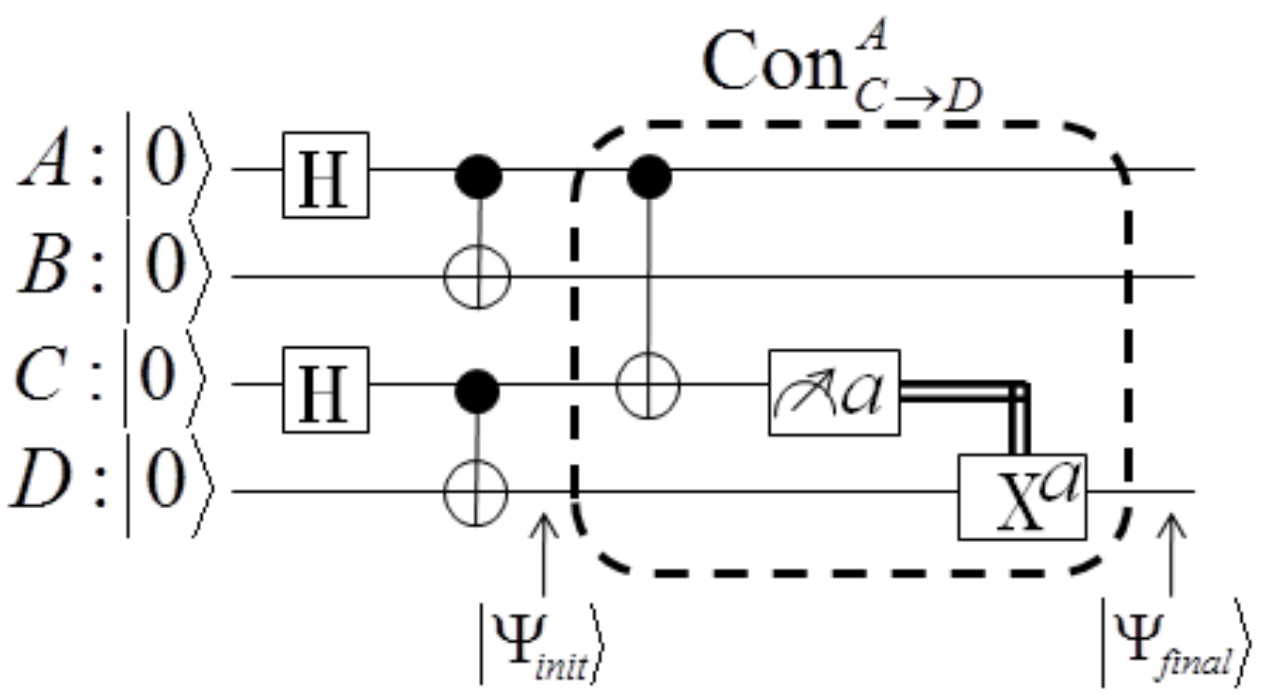

FIG. 4. The quantum circuit for getting GHZ-states from two EPR-pairs by Connection.

TABLE II. $\mathbf{Fanout}^{C}_{R_1->T_1,R_2->T_2}$

	C, R_1 and R_2 are 1-qubit registers owned by u.
	T_1 is a 1-qubit register owned by v.
	T_2 is a 1-qubit register owned by w.
Step 1.	u and v apply $\mathbf{Con}^{C}_{R_1->T_1}$.
Step 2.	u and w apply $\mathbf{Con}^{C}_{R_2->T_2}$.

gives one GHZ-state:

$$|\Psi_{final}\rangle = |GHZ\rangle_{ABD}.$$

We show the corresponding quantum circuit in Fig. 4.

We now show two variants of the above Connection operation. The first variant is "multiple resource and target qubits" Connection and called Connection:Fanout (or **Fanout**). We show the procedure for Connection:Fanout as table II.

Note that applying $\mathbf{Fanout}^{C}_{R_1->T_1,R_2->T_2}$ is equivalent to applying $\mathbf{Con}^{C}_{R_1->T_1}$ and then $\mathbf{Con}^{C}_{R_2->T_2}$. We can derive the following lemma.

Lemma 2. *Let $|\Psi_{init}\rangle$ be a state of the form*

$$|\Psi_{init}\rangle = (\alpha|\psi_0\rangle|0\rangle_A + \beta|\psi_1\rangle|1\rangle_A)\,|\Psi^+\rangle_{BC}|\Psi^+\rangle_{DE} \otimes |\Phi\rangle,$$

where $\alpha^2+\beta^2 = 1$ and $|\psi_0\rangle$, $|\psi_1\rangle$ and $|\Phi\rangle$ are arbitrary quantum states. Then the state after applying $\mathbf{Fanout}^{A}_{B->C,D->E}$ to $|\Psi_{init}\rangle$ is

$$|\Psi_{final}\rangle = (\alpha|\psi_0\rangle|000\rangle_{ACE} + \beta|\psi_1\rangle|111\rangle_{ACE}) \otimes |\Phi\rangle,$$

where registers B and D can be disregarded.

Proof. At step 1, we apply $\mathbf{Con}^{A}_{B->C}$ to $|\Psi_{init}\rangle$. From Lemma 1, the state becomes

$$|\Psi_1\rangle = (\alpha|\psi_0\rangle|00\rangle_{AC} + \beta|\psi_1\rangle|11\rangle_{AC})\,|\Psi^+\rangle_{DE} \otimes |\Phi\rangle,$$

where register B has been disregarded since it is not entangled anymore. At step 2, we apply $\mathbf{Con}^{A}_{D->E}$ to $|\Psi_1\rangle$. From Lemma 1, the state becomes

$$\begin{aligned}|\Psi_2\rangle &= (\alpha|\psi_0\rangle|000\rangle_{ACE} + \beta|\psi_1\rangle|111\rangle_{ACE}) \otimes |\Phi\rangle\\ &= |\Psi_{final}\rangle,\end{aligned}$$

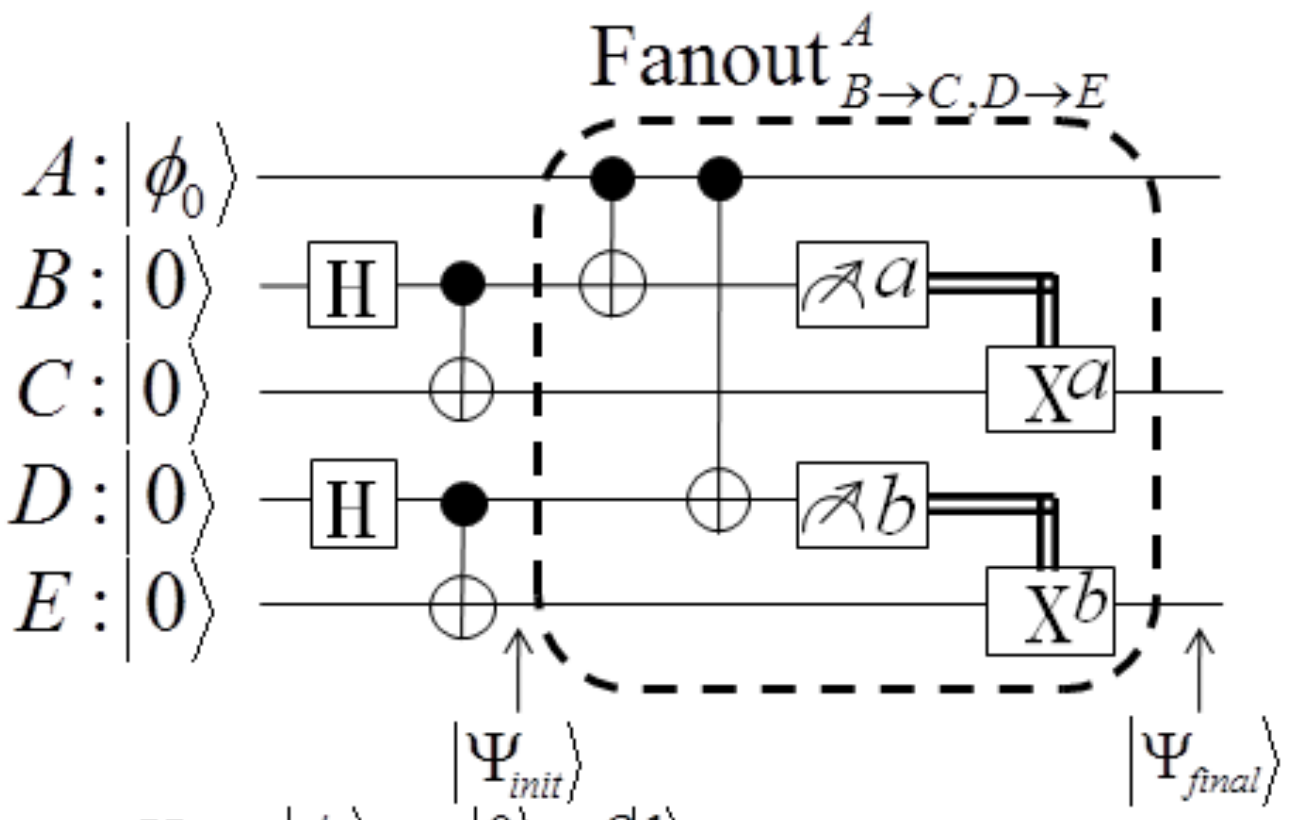

Here, $|\phi_0\rangle = \alpha|0\rangle + \beta|1\rangle$.

FIG. 5. The circuit for Connection:Fanout.

TABLE III. $\mathbf{Add}^{C_1,C_2}_{R->T}$

	C_1, C_2 and R are 1-qubit registers owned by u.
	T is a 1-qubit registers owned by v.
Step 1.	u applies $CNOT^{(C_1,R)}$.
Step 2.	u and v apply $Con^{C_2}_{R->T}$.

where register D has been disregarded since it is not entangled anymore. □

For example, Lemma 2 shows that applying $\mathbf{Fanout}^{A}_{B->C,D->E}$ to

$$|\Psi_{init}\rangle = (\alpha|0\rangle_A + \beta|1\rangle_A)\,|\Psi^+\rangle_{BC}|\Psi^+\rangle_{DE}$$

gives the following quantum state:

$$|\Psi_{final}\rangle = \alpha|000\rangle_{ACE} + \beta|111\rangle_{ACE}.$$

We show the corresponding circuit in Fig. 5.

The next variant is "multiple control qubits" Connection and called Connection:Add (or **Add**). We show the procedure for Connection:Add as Table III, and prove the following lemma.

Lemma 3. *Let $|\Psi_{init}\rangle$ be a state of the form*

$$\begin{aligned}|\Psi_{init}\rangle &= (\alpha|\psi_0\rangle|0\rangle_A + \beta|\psi_1\rangle|1\rangle_A)\\ &\quad\otimes(\gamma|\phi_0\rangle|0\rangle_B + \delta|\phi_1\rangle|1\rangle_B)|\Psi^+\rangle_{CD} \otimes |\Phi\rangle,\end{aligned}$$

where $\alpha^2+\beta^2 = \gamma^2+\delta^2 = 1$ and $|\psi_0\rangle$, $|\psi_1\rangle$, $|\phi_0\rangle$, $|\phi_1\rangle$ and $|\Phi\rangle$ are arbitrary quantum states. Then the state after applying $\mathbf{Add}^{A,B}_{C->D}$ to $|\Psi_{init}\rangle$ is

$$\begin{aligned}|\Psi_{final}\rangle = \big(&(\alpha\gamma|\psi_0\rangle|\phi_0\rangle|00\rangle_{AB} + \beta\delta|\psi_1\rangle|\phi_1\rangle|11\rangle_{AB})\,|0\rangle_D\\ &+(\alpha\delta|\psi_0\rangle|\phi_1\rangle|01\rangle_{AB} + \beta\gamma|\psi_1\rangle|\phi_0\rangle|10\rangle_{AB})|1\rangle_D\big)|\Phi\rangle.\end{aligned}$$

where register C can be disregarded.

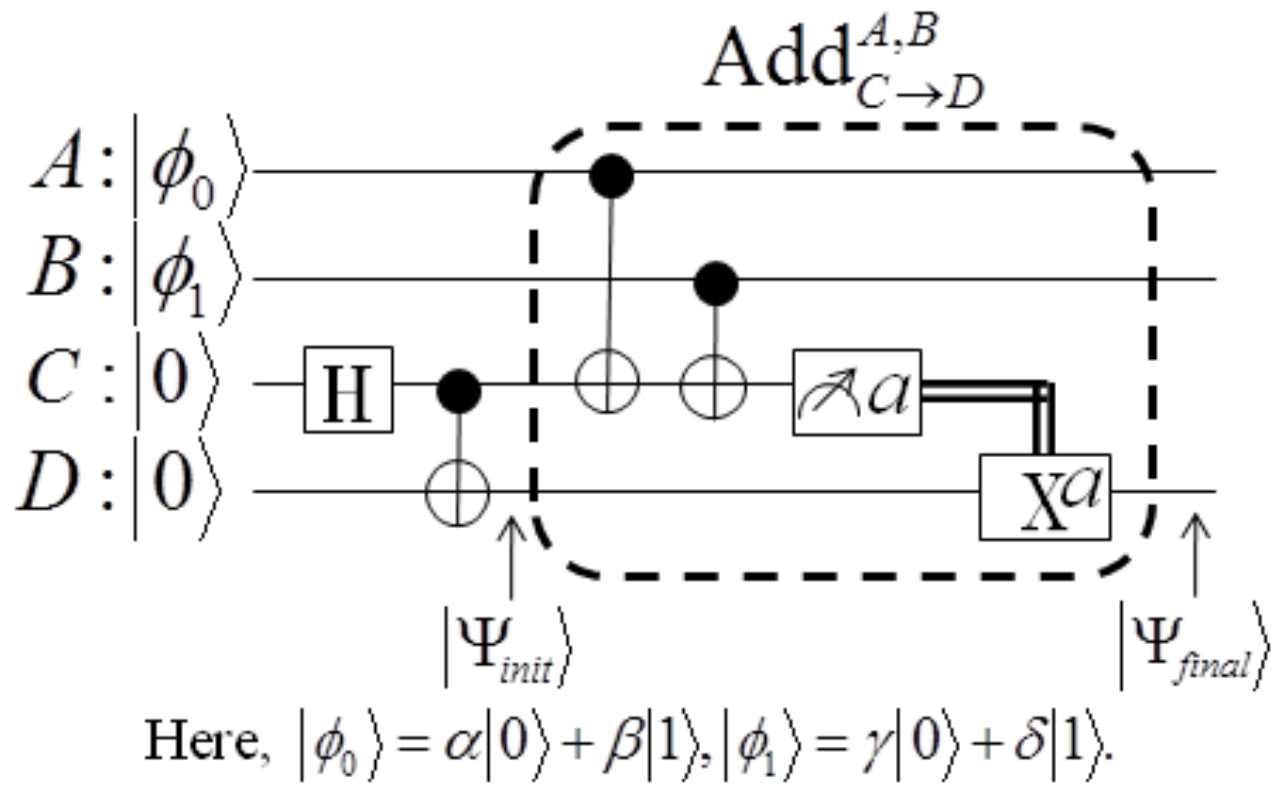
$\mathrm{Add}^{A,B}_{C\to D}$
$A:|\phi_0\rangle$
$B:|\phi_1\rangle$
$C:|0\rangle$
$D:|0\rangle$
H
a
X^a
$|\Psi_{init}\rangle$
$|\Psi_{final}\rangle$
Here, $|\phi_0\rangle=\alpha|0\rangle+\beta|1\rangle, |\phi_1\rangle=\gamma|0\rangle+\delta|1\rangle$.

FIG. 6. The circuit for Connection:Add.

Proof. At step 1, we apply $CNOT^{(A,C)}$. The state becomes

$$\begin{aligned}|\Psi_1\rangle = \big(&\alpha|\psi_0\rangle|0\rangle_A\left(\gamma|\phi_0\rangle|0\rangle_B + \delta|\phi_1\rangle|1\rangle_B\right)\otimes|\Psi^+\rangle_{CD}\\ &+\beta|\psi_1\rangle|1\rangle_A\left(\gamma|\phi_0\rangle|0\rangle_B + \delta|\phi_1\rangle|1\rangle_B\right)\otimes|\Phi^+\rangle_{CD}\big)|\Phi\rangle.\end{aligned}$$

From Lemma 1, the final state:

$$\begin{aligned}|\Psi_4\rangle = \big(&\left(\alpha\gamma|\psi_0\rangle|\phi_0\rangle|00\rangle_{AB} + \beta\delta|\psi_1\rangle|\phi_1\rangle|11\rangle_{AB}\right)|0\rangle_D\\ &+(\alpha\delta|\psi_0\rangle|\phi_1\rangle|01\rangle_{AB} + \beta\gamma|\psi_1\rangle|\phi_0\rangle|10\rangle_{AB})|1\rangle_D\big)|\Phi\rangle\\ =&\ |\Psi_{final}\rangle.\end{aligned}$$

where register C has been disregarded since it is not entangled anymore. □

For example, Lemma 3 shows that applying $\mathbf{Add}^{A,B}_{C->D}$ to

$$|\Psi_{init}\rangle = (\alpha|0\rangle_A + \beta|1\rangle_A)\otimes(\gamma|0\rangle_B + \delta|1\rangle_B)\,|\Psi^+\rangle_{CD}$$

gives the following quantum state:

$$\begin{aligned}|\Psi_{final}\rangle =& (\alpha\gamma|00\rangle_{AB} + \beta\delta|11\rangle_{AB})|0\rangle_D\\ &+(\alpha\delta|01\rangle_{AB} + \beta\gamma|10\rangle_{AB})|1\rangle_D.\end{aligned}$$

We show the corresponding circuit in Fig. 6.

B. Technique 2: Removal

Our second technique is called Removal. Removal is a non-unitary operation between two repeaters (u and v, respectively) which deletes a resource qubit (R) of a quantum state using measurement in the Hadamard basis and σ_Z. The procedure for Removal is shown as Table IV. This technique is inspired by the qubit removal method using pauli measurements in one-way quantum computing [23] (e.g., qubit removal from the graph states by using a Z basis) measurement). The following lemma shows the action of Removal.

TABLE IV. $\mathbf{Rem}_{R->T}$

	R is a 1-qubit register owned by u. T is a 1-qubit register owned by v.
Step 1.	u applies the Hadamard gate to R.
Step 2.	u measures R in $\{|0\rangle,|1\rangle\}$ basis. Let $a\in\{0,1\}$ be the outcome.
Step 3.	v sends a to v by classical channel.
Step 4.	If $a=1$ then repeater v applies σ_Z to T

Lemma 4. *Let* $|\Psi_{init}\rangle$ *be a state of the form*

$$|\Psi_{init}\rangle = (\alpha|00\rangle_{AB}|\psi_{00}\rangle + \beta|11\rangle_{AB}|\psi_{11}\rangle)\otimes|\Phi\rangle,$$

where $|\alpha|^2+|\beta|^2=1$, *and* $|\psi_{00}\rangle$, $|\psi_{11}\rangle$, $|\Phi\rangle$ *are arbitrary quantum states. Then by applying* $\mathbf{Rem}_{A->B}$ *on* $|\Psi_{init}\rangle$, *we obtain the state*

$$|\Psi_{final}\rangle = (\alpha|0\rangle_B|\psi_{00}\rangle + \beta|1\rangle_B|\psi_{11}\rangle)\otimes|\Phi\rangle.$$

where register C can be disregarded.

Proof. At step 1, we apply the Hadamard gate to A. The state becomes

$$|\Psi_1\rangle = (\alpha|{+}0\rangle_{AB}|\psi_{00}\rangle + \beta|{-}1\rangle_{A,B}|\psi_{11}\rangle)\otimes|\Phi\rangle.$$

At step 2, we measure A. After this step, when $a=0$ the state is

$$|\Psi_2\rangle = (\alpha|0\rangle_B|\psi_{00}\rangle + \beta|1\rangle_B|\psi_{11}\rangle)\otimes|\Phi\rangle,$$

and when $a=1$ the state is

$$|\Psi_{2'}\rangle = (\alpha|0\rangle_B|\psi_{00}\rangle - \beta|1\rangle_B|\psi_{11}\rangle)\otimes|\Phi\rangle,$$

where register A can be disregarded since it is not entangled anymore. At step 4, if $a=1$ then we apply σ_Z to T. The state becomes

$$|\Psi_4\rangle = (\alpha|0\rangle_B|\psi_{00}\rangle + \beta|1\rangle_B|\psi_{11}\rangle)\otimes|\Phi\rangle = |\Psi_{final}\rangle.$$ □

Lemma 4 shows that Removal is able to "delete" the target qubit used in a Connection operation (compare with Lemma 1). For instance, by applying $\mathbf{Rem}_{A->B}$ on the GHZ-state

$$|\Psi_{init}\rangle = |GHZ\rangle_{ABC},$$

we obtain the EPR-pair

$$|\Psi_{final}\rangle = |\Psi^+\rangle_{BC}.$$

The corresponding circuit is shown in Fig. 7.

We now present a variant of **Rem** that will delete the target qubit used in Connection:Add operation. We call this operation Removal:Add (**RemAdd**) and show the procedure as Table V. We can derive the following lemma.

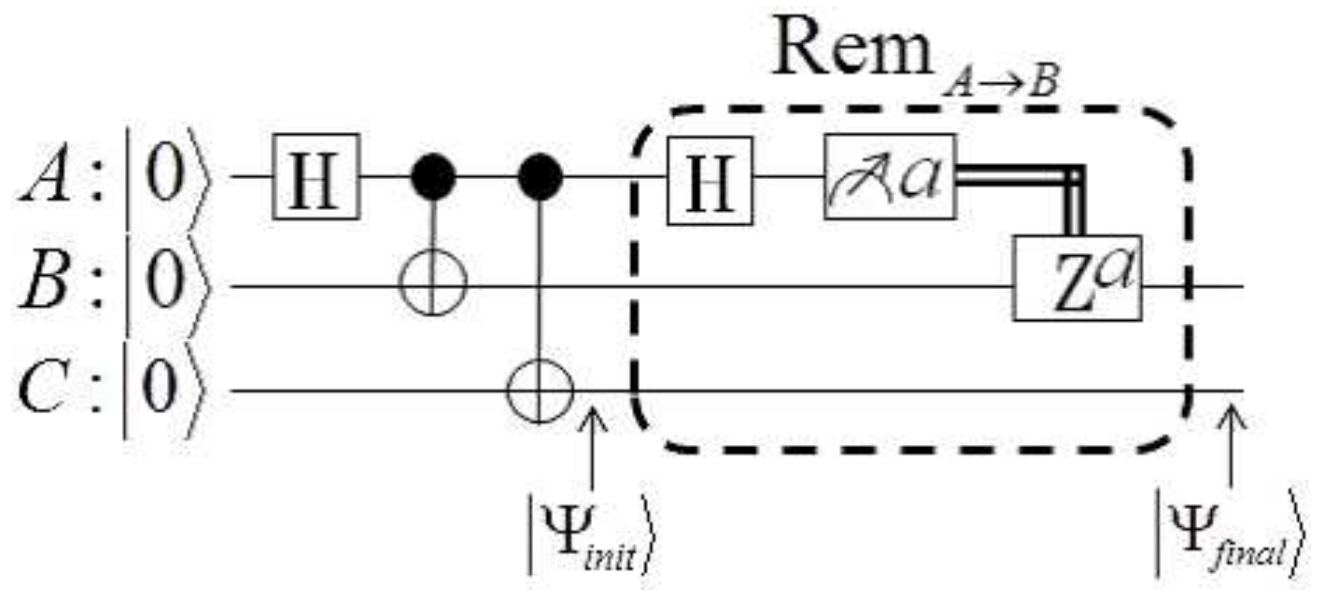

FIG. 7. The circuit for Removal.

TABLE V. $\mathbf{RemAdd}_{R->T_1,T_2}$

	R is a 1-qubit register owned by u.
	T_1 is a 1-qubit register owned by v.
	T_2 is a 1-qubit register owned by w.
Step 1.	Repeater u applies the Hadamard gate to R.
Step 2.	u measures R in $\{|0\rangle, |1\rangle\}$ basis. Let a be the outcome.
Step 3.	v sends $a \in \{0,1\}$ to v and w by classical channel.
Step 4.	If $a = 1$ then repeater v and w applies σ_Z to T_1 and T_2

Lemma 5. *Let $|\Psi_{init}\rangle$ be a state of the form*

$$|\Psi_{init}\rangle = \left(\sum_{i,j=0}^{1} a_{ij}|ij\rangle_{AB}|i\oplus j\rangle_C|\psi_{ij}\rangle\right)\otimes|\Phi\rangle,$$

where $\sum_{i,j}|a_{ij}|^2 = 1$, and $|\psi_{i,j}\rangle$, $|\Phi\rangle$ are arbitrary quantum states. Then by applying $\mathbf{RemAdd}_{C->A,B}$, we obtain the state

$$|\Psi_{final}\rangle = \left(\sum_{i,j=0}^{1} a_{ij}|ij\rangle_{AB}|\psi_{ij}\rangle\right)\otimes|\Phi\rangle,$$

where register C can be disregarded.

Proof. At step 1, we apply the Hadamard gate to C. The state becomes

$$\begin{aligned}|\Psi_1\rangle = \big(&|+\rangle_C \otimes (a_{00}|00\rangle_{AB}|\psi_{00}\rangle + a_{11}|11\rangle_{AB}|\psi_{11}\rangle)\\ &+|-\rangle_C \otimes (a_{01}|01\rangle_{AB}|\psi_{01}\rangle + a_{10}|10\rangle_{AB}|\psi_{10}\rangle)\big)\otimes|\Phi\rangle.\end{aligned}$$

At step 2, we measure C. When $a = 0$ the state becomes

$$\begin{aligned}|\Psi_2\rangle = \big(&(a_{00}|00\rangle_{AB}|\psi_{00}\rangle + a_{11}|11\rangle_{AB}|\psi_{11}\rangle)\\ &+(a_{01}|01\rangle_{AB}|\psi_{01}\rangle + a_{10}|10\rangle_{AB}|\psi_{10}\rangle)\big)\otimes|\Phi\rangle,\end{aligned}$$

and when $a = 1$ the state becomes

$$\begin{aligned}|\Psi_{2'}\rangle = \big(&(a_{00}|00\rangle_{AB}|\psi_{00}\rangle + a_{11}|11\rangle_{AB}|\psi_{11}\rangle)\\ &-(a_{01}|01\rangle_{AB}|\psi_{01}\rangle + a_{10}|10\rangle_{AB}|\psi_{10}\rangle)\big)\otimes|\Phi\rangle,\end{aligned}$$

where register C can be disregarded since it is not entangled anymore. At step 4, if $a = 1$ then we apply σ_Z to A and B. The state becomes

$$|\Psi_4\rangle = \left(\sum a_{ij}|ij\rangle_{AB}|\psi_{ij}\rangle\right)\otimes|\Phi\rangle = |\Psi_{final}\rangle. \qquad \square$$

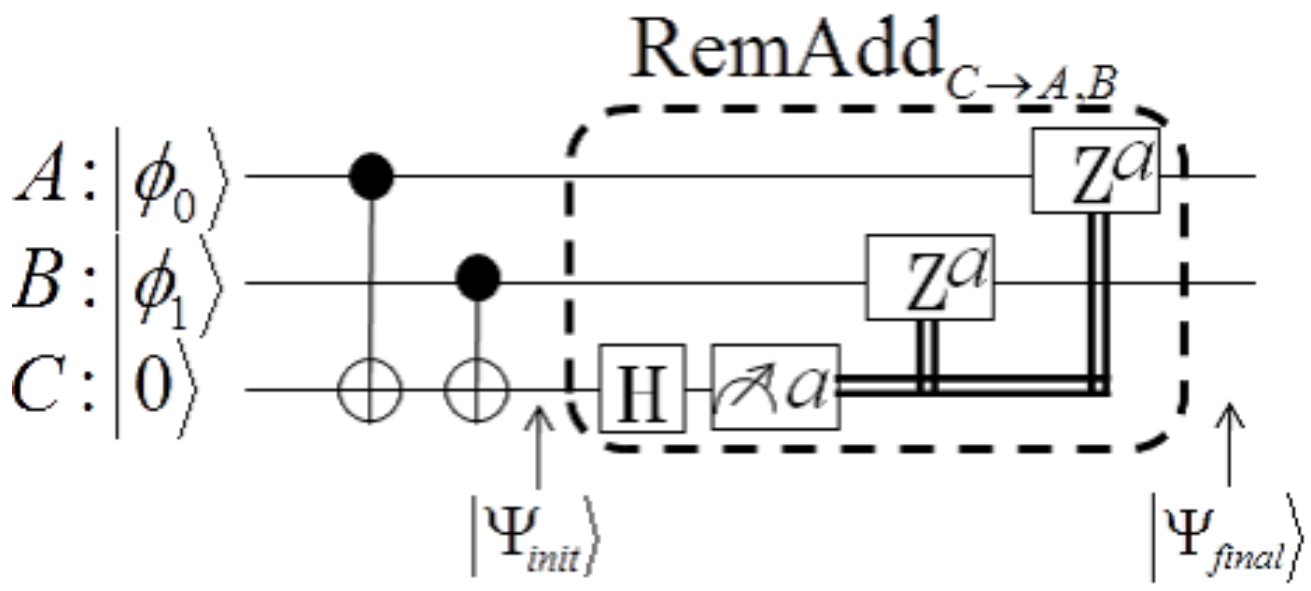

Here, $|\phi_0\rangle = \alpha|0\rangle + \beta|1\rangle, |\phi_1\rangle = \gamma|0\rangle + \delta|1\rangle$.

FIG. 8. The circuit for Removal:Add.

For example, Lemma 5 shows that applying $\mathbf{RemAdd}_{C->A,B}$ to

$$\begin{aligned}|\Psi_{init}\rangle &= (\alpha\gamma|00\rangle_{AB} + \beta\delta|11\rangle_{AB})\,|0\rangle_C\\ &\quad+(\alpha\delta|01\rangle_{AB} + \beta\gamma|10\rangle_{AB})\,|1\rangle_C\end{aligned}$$

gives the following quantum state:

$$|\Psi_{final}\rangle = (\alpha|0\rangle_A + \beta|1\rangle_A)\otimes(\gamma|0\rangle_B + \delta|1\rangle_B)\,.$$

The corresponding circuit is shown in Fig. 8.

C. Overview of our encoding protocol

We now give an overview of our protocol for the butterfly quantum repeater network of Fig. 3. We will give a complete description of our protocol in subsections D and E.

The first half of our protocol simulates the classical strategy of Fig. 1. For this purpose, each repeater applies **Add** or **Fanout** operations. We show the correspondence between classical and quantum operations in Fig. 9. Applying $\mathbf{Add}^{B,D}_{E->F}$ to

$$|\Psi_{init}\rangle = |\Psi^+\rangle_{AB}\otimes|\Psi^+\rangle_{CD}\otimes|\Psi^+\rangle_{EF}$$

gives the following quantum state:

$$\begin{aligned}|\Psi_{final}\rangle &= \frac{1}{2}(|0000\rangle_{ABCD} + |1111\rangle_{ABCD})\otimes|0\rangle_F\\ &\quad+\frac{1}{2}(|1100\rangle_{ABCD} + |1100\rangle_{ABCD})\otimes|1\rangle_F.\end{aligned}$$

Thus $\mathbf{Add}^{B,D}_{E->F}$ corresponds to the classical parity operation (computing the parity of B and D into register F). Applying $\mathbf{Fanout}^{B}_{C->D,E->F}$ to

$$|\Psi_{init}\rangle = |\Psi^+\rangle_{AB}\otimes|\Psi^+\rangle_{CD}\otimes|\Psi^+\rangle_{EF}$$

gives the following quantum state:

$$|\Psi_{final}\rangle = \frac{1}{\sqrt{2}}(|0000\rangle_{ABDF} + |1111\rangle_{ABDF}).$$

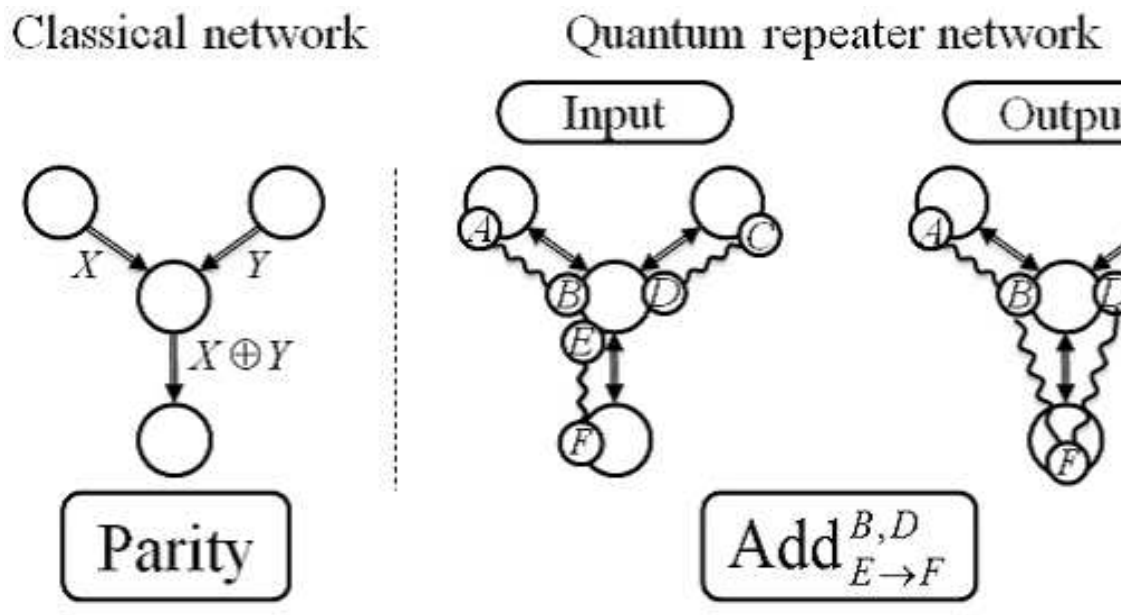

(a) Classical parity and quantum add operation.

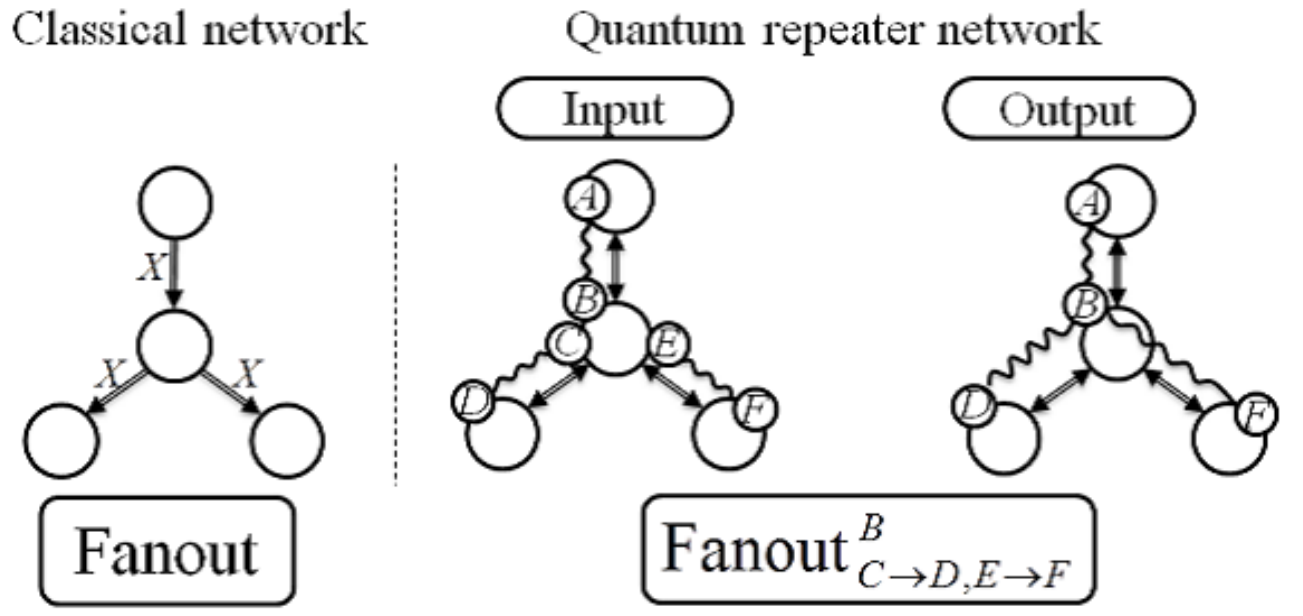

(b) Classical and quantum fanout operation.

FIG. 9. The correspondence between classical and quantum coding.

$\mathbf{Fanout}^{B}_{C->D,E->F}$ corresponds to the classical fanout operation (copying B into registers D and F).

The second half of our protocol will delete redundant registers by **Rem** and **RemAdd** operations.

A difficulty is that this correspondence of Fig. 9 cannot be used for the encoding performed at the sender nodes because the sender nodes have no control qubit (i.e., the sender nodes have no incoming edges). To deal with this, we will introduce additional registers as control qubits and describe quantum repeater network coding protocol for this setting in subsection D. We will then show that our protocol can work without additional registers in subsection E.

D. Encoding with additional registers

In this subsection we assume that s_1 has an additional register A' with state $|+\rangle_{A'}$ and s_2 has an additional register E' with state $|+\rangle_{E'}$. The registers A' and E' will be used as control qubits for the **Fanout** operations performed by the senders. We present our procedure as Table VI, and show below the evolution of the quantum state of the system.

The input state is

$$|\Psi_0\rangle = |+\rangle_{A'}|\Psi^+\rangle_{AB}|\Psi^+\rangle_{CD}|+\rangle_{E'}|\Psi^+\rangle_{EF}|\Psi^+\rangle_{GH} \otimes|\Psi^+\rangle_{IJ}|\Psi^+\rangle_{KL}|\Psi^+\rangle_{MN}. \tag{1}$$

TABLE VI. Encoding

Step 1.	s_1 and r_1 apply $\mathbf{Fanout}^{A'}_{A->B,C->D}$,
	s_2 and r_1 apply $\mathbf{Fanout}^{E'}_{E->F,G->H}$.
Step 2.	r_1 and r_2 apply $\mathbf{Add}^{D,H}_{I->J}$.
Step 3.	r_2, t_1 and t_2 apply $\mathbf{Fanout}^{J}_{K->L,M->N}$.
Step 4.	t_1 applies $\mathbf{CNOT}^{(N,F)}$, t_2 applies $\mathbf{CNOT}^{(L,B)}$.
Step 5.	t_2 and r_2 apply $\mathbf{Rem}_{L->J}$,
	t_1 and r_2 apply $\mathbf{Rem}_{N->J}$.
Step 6.	r_2 and r_1 apply $\mathbf{RemAdd}_{J->D,H}$.
Step 7.	r_1 and s_1 apply $\mathbf{Rem}_{D->A'}$,
	r_1 and s_2 apply $\mathbf{Rem}_{H->E'}$.

At step 1, s_1 and t_2 apply Connection:Fanout. (s_2 and t_1 do the same.) From Lemma 2, the state becomes

$$|\Psi_1\rangle = |GHZ\rangle_{A'BD}|GHZ\rangle_{E'FH}|\Psi^+\rangle_{IJ}|\Psi^+\rangle_{KL}|\Psi^+\rangle_{MN}.$$

At step 2, r_1 and r_2 apply Connection:Add. From Lemma 3, the state becomes

$$\begin{aligned}|\Psi_2\rangle = {}& \frac{1}{2}\left(|000000\rangle_{A'BDE'FH} + |111111\rangle_{A'BDE'FH}\right)|0\rangle_J \\ & \otimes|\Psi^+\rangle_{KL}|\Psi^+\rangle_{MN} \\ & +\frac{1}{2}\left(|000111\rangle_{A'BDE'FH} + |111000\rangle_{A'BDE'FH}\right)|1\rangle_j \\ & \otimes|\Psi^+\rangle_{KL}|\Psi^+\rangle_{MN}.\end{aligned}$$

At step 3, r_2, t_1 and t_2 apply Connection:Fanout. From Lemma 2, The state becomes

$$\begin{aligned}|\Psi_3\rangle = {}& \frac{1}{2}\left(|000000\rangle_{A'BDE'FH} + |111111\rangle_{A'BDE'FH}\right) \\ & \otimes|000\rangle_{JLN} \\ & +\frac{1}{2}\left(|000111\rangle_{A'BDE'FH} + |111000\rangle_{A'BDE'FH}\right) \\ & \otimes|111\rangle_{JLN}.\end{aligned}$$

At step 4, t_1 and t_2 aplly C-NOT. The state becomes

$$\begin{aligned}|\Psi_4\rangle = {}& \frac{1}{2}\left(|000000\rangle_{A'BDE'FH} + |111111\rangle_{A'BDE'FH}\right) \\ & \otimes|000\rangle_{JLN} \\ & +\frac{1}{2}\left(|010101\rangle_{A'BDE'FH} + |101010\rangle_{A'BDE'FH}\right) \\ & \otimes|111\rangle_{JLN}.\end{aligned}$$

At step 5, t_1 and t_2 delete redundant registers N and F using Removal. From Lemma 4, the state becomes

$$\begin{aligned}|\Psi_5\rangle = {}& \frac{1}{2}\left(|000000\rangle_{A'BDE'FH} + |111111\rangle_{A'BDE'FH}\right)|0\rangle_J \\ & +\frac{1}{2}\left(|010101\rangle_{A'BDE'FH} + |101010\rangle_{A'BDE'FH}\right)|1\rangle_J.\end{aligned}$$

At step 6, r_2 deletes the redundant register J using Removal:Add. From Lemma 5, the state becomes

$$\begin{aligned}|\Psi_6\rangle = {}& \frac{1}{2}\left(|000000\rangle_{A'BDE'FH} + |111111\rangle_{A'BDE'FH}\right) \\ & +\frac{1}{2}\left(|010101\rangle_{A'BDE'FH} + |101010\rangle_{A'BDE'FH}\right).\end{aligned}$$

TABLE VII. Encoding without additional registers

Step 1.	s_1 and r_1 apply $\mathbf{Con}^{A}_{C->D}$, s_2 and r_1 apply $\mathbf{Con}^{E}_{G->H}$.
Step 2.	r_1 and r_2 apply $\mathbf{Add}^{D,H}_{I->J}$.
Step 3.	r_2, t_1 and t_2 apply $\mathbf{Fanout}^{J}_{K->L,M->N}$.
Step 4.	t_1 applies $\mathbf{CNOT}^{(N,F)}$, t_2 applies $\mathbf{CNOT}^{(L,B)}$.
Step 5.	t_2 and r_2 apply $\mathbf{Rem}_{L->J}$, t_1 and r_2 apply $\mathbf{Rem}_{N->J}$.
Step 6.	r_2 and r_1 apply $\mathbf{RemAdd}_{J->D,H}$.
Step 7.	r_1 and s_1 apply $\mathbf{Rem}_{D->A}$, r_1 and s_2 apply $\mathbf{Rem}_{H->E}$.

At step 7, r_1 deletes redundant registers D and H using Removal the same way as in step 5. The state becomes

$$\begin{aligned}|\Psi_7\rangle = \frac{1}{2}\left(|0000\rangle_{A'BE'F} + |1111\rangle_{A'BE'F}\right)\\ +\frac{1}{2}\left(|0110\rangle_{A'BE'F} + |1001\rangle_{A'BE'F}\right)\\ = |\Psi^+\rangle_{A'F} \otimes |\Psi^+\rangle_{B'E}\end{aligned}$$

We obtain separated EPR-pairs. The first one is owned by (s_1, t_1), and the second by (s_2, t_2).

In the next subsection, we describe an encoding protocol without additional registers based on the above protocol.

E. Encoding without additional registers

We now show how to use the result of the previous subsection to construct a network coding scheme over the network of Fig. 3 (i.e., without additional registers). When there are no additional registers, the input state is

$$\begin{aligned}|\Psi_{0'}\rangle = |\Psi^+\rangle_{AB}|\Psi^+\rangle_{CD}|\Psi^+\rangle_{EF}|\Psi^+\rangle_{GH}|\Psi^+\rangle_{IJ}|\Psi^+\rangle_{KL}\\ \otimes|\Psi^+\rangle_{MN}.\end{aligned}$$

Suppose that s_1 and t_2 apply $\mathbf{Con}^{A}_{C->D}$, and s_2 and t_1 apply $\mathbf{Con}^{E}_{G->H}$. The state becomes

$$|\Psi_{1'}\rangle = |GHZ\rangle_{ABD}|GHZ\rangle_{EFH}|\Psi^+\rangle_{IJ}|\Psi^+\rangle_{KL}|\Psi^+\rangle_{MN}.$$

Compare with state (1), the two states are the same if we take $A = A'$ and $E = E'$. Then, if we apply steps 2-7 as in the previous section, we obtain the state

$$|\Psi_{7'}\rangle = |\Psi^+\rangle_{AF} \otimes |\Psi^+\rangle_{BE}.$$

Thus, the only modification we have to make is to replace step 1 in the procedure of the previous subsection. The whole procedure for network coding over the network of Fig. 3 is described as Table VII. We show the corresponding circuit in Fig. 10.

IV. CONCLUSION

Our protocol shows that quantum network coding techniques are operational using only LOCC and shared EPR-pairs between adjacent repeaters (i.e., without additional quantum registers). This method has been described for the butterfly network but can be actually extended to other linear network coding schemes on other graphs. We expect that this protocol will be a fundamental tool to apply techniques from network coding to real quantum repeater networks.

---

[1] M. Peev, et al, New Journal of Physics **11**, 075001 (2009).

[2] M. Sasaki, et al, Opt. Express **19**, 10387 (2011).

[3] W. Dür, H.-J. Briegel, J. I. Cirac, and P. Zoller, Phys. Rev. A **59**, 169 (1999).

[4] S. Lloyd, J. H. Shapiro, F. N. C. Wong, P. Kumar, S. M. Shahriar, and H. P. Yuen, SIGCOMM Comput. Commun. Rev. **34**, 9 (2004).

[5] H.-J. Briegel, W. Dür, J. I. Cirac, and P. Zoller, Phys. Rev. Lett. **81**, 5932 (1998).

[6] W. Dür and H. J. Briegel, Reports on Progress in Physics **70**, 1381 (2007).

[7] R. Van Meter, T. D. Ladd, W. J. Munro, and K. Nemoto, IEEE/ACM Trans. Netw. **17**, 1002 (2009).

[8] L. Jiang, J. M. Taylor, K. Nemoto, W. J. Munro, R. Van Meter, and M. D. Lukin, Phys. Rev. A **79**, 032325 (2009).

[9] W. J. Munro, K. A. Harrison, A. M. Stephens, S. J. Devitt, and K. Nemoto, Nature Photonics **4**, 792 (2010).

[10] A. G. Fowler, D. S. Wang, C. D. Hill, T. D. Ladd, R. Van Meter, and L. C. L. Hollenberg, Phys. Rev. Lett. **104**, 180503 (2010).

[11] M. Zukowski, A. Zeilinger, M. A. Horne, and A. K. Ekert, Phys. Rev. Lett. **71**, 4287 (1993).

[12] S. Bose, V. Vedral, and P. L. Knight, Phys. Rev. A **57**, 822 (1998).

[13] R. Van Meter, J. Touch, and C. Horsman, Progress In Informatics **8**, 65 (2011).

[14] R. Ahlswede, N. Cai, S. R. Li, and R. W. Yeung, IEEE Transactions on Information Theory **46**, 1204 (2000).

[15] M. Hayashi, K. Iwama, H. Nishimura, R. Raymond, and S. Yamashita, in *Symposium on Theoretical Aspects of Computer Science* (2007) pp. 610–621.

[16] D. Leung, J. Oppenheim, and A. Winter, IEEE Transactions on Information Theory **56**, 3478 (2010).

[17] M. Hayashi, Phys. Rev. A **76**, 040301 (2007).

[18] Y. Shi and E. Soljanin, in *40th Annual Conference on Information Sciences and Systems* (2006) pp. 871–876.

[19] H. Kobayashi, F. Le Gall, H. Nishimura, and M. Roetteler, in *36th International Colloquium on Automata, Languages and Programming* (2009) pp. 622–633.

[20] H. Kobayashi, F. Le Gall, H. Nishimura, and M. Roetteler, in *2010 IEEE International Symposium on Information Theory* (2010) pp. 2686–2690.

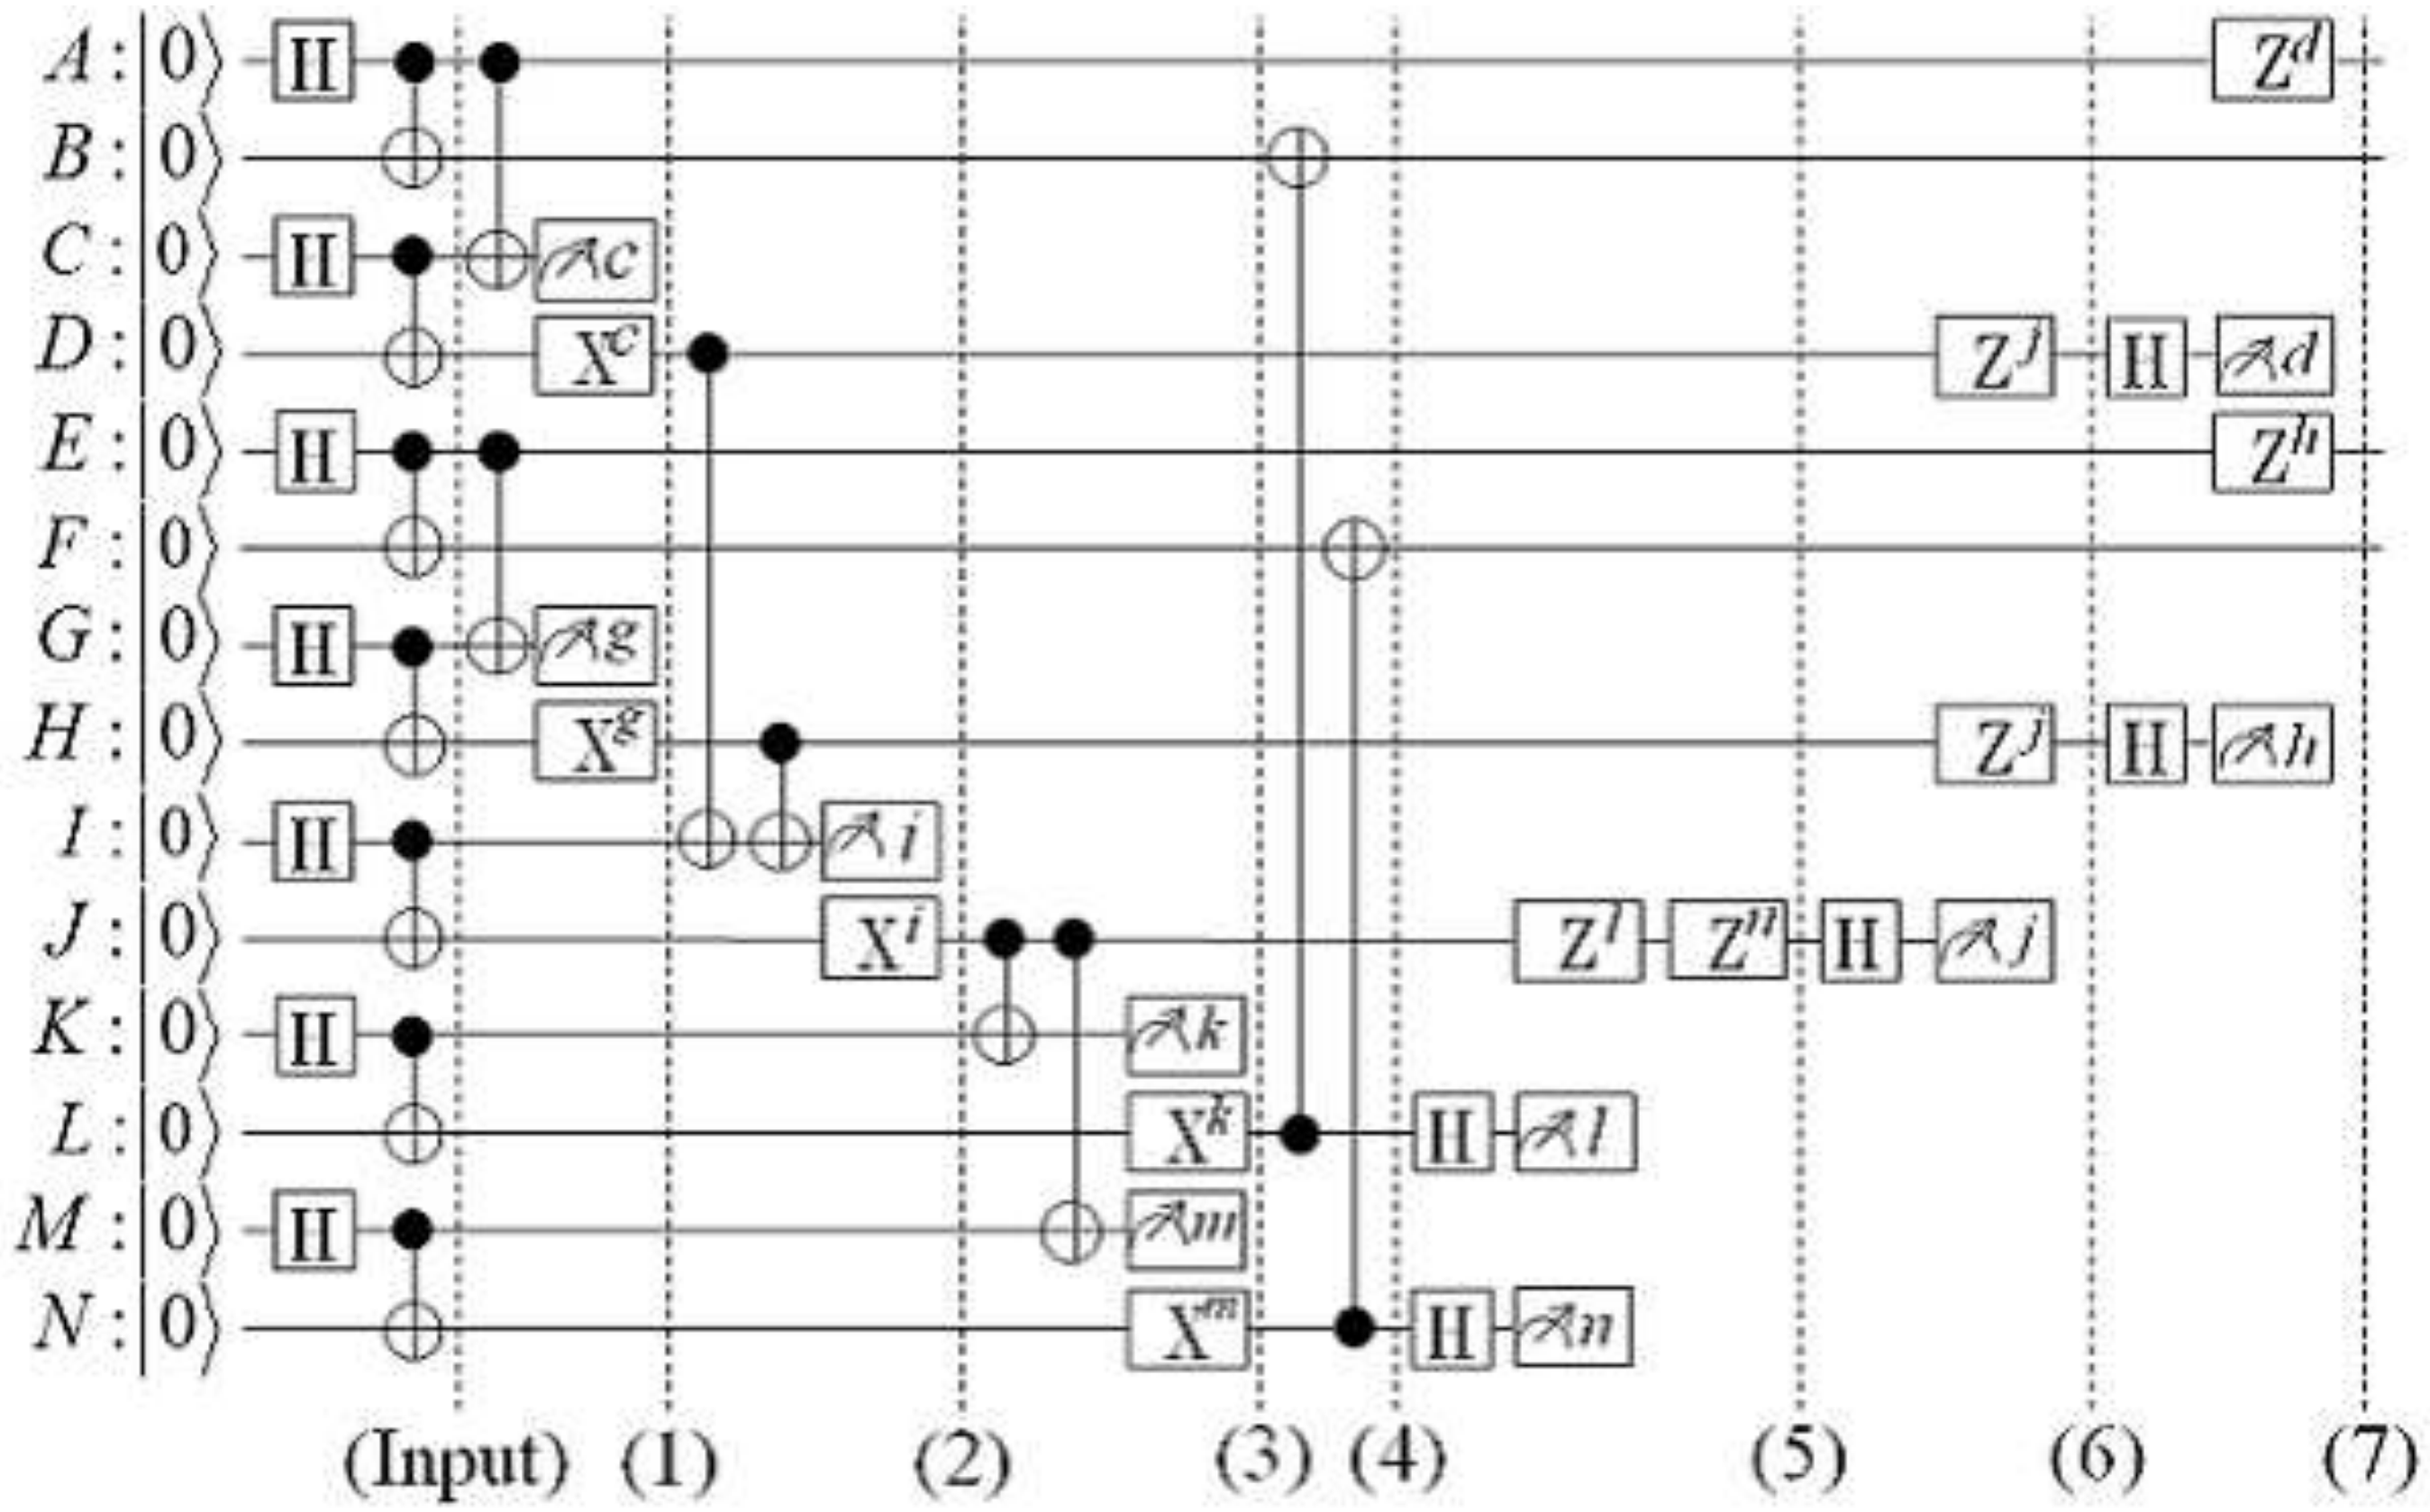

FIG. 10. Overall view of the encoding circuit. Parenthetic numbers refer to the state after each step of the encoding procedure of Table VII.

[21] H. Kobayashi, F. Le Gall, H. Nishimura, and M. Roetteler, in *2011 IEEE International Symposium on Information Theory* (2011) pp. 109–113.

[22] C. H. Bennett, G. Brassard, C. Crépeau, R. Jozsa, A. Peres, and W. K. Wootters, Phys. Rev. Lett. **70**, 1895 (1993).

[23] R. Raussendorf, D. E. Browne, and H.-J. Briegel, Phys. Rev. A **68**, 022312 (2003).

[24] M. A. Nielsen and I. L. Chuang, *Quantum Computation and Quantum Information* (Cambridge University Press, 2000).